


Steel

KapToggle®

Anchors

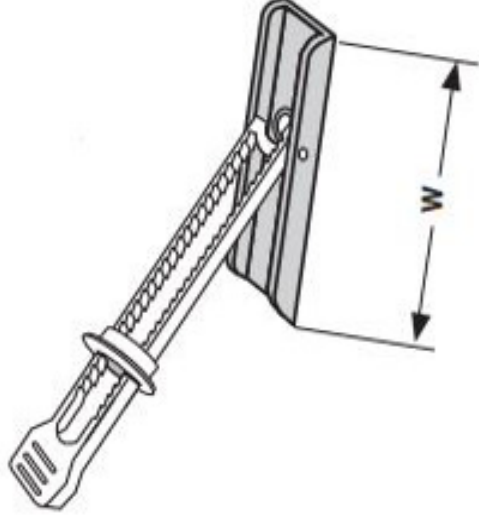

KAPTOGGLE®												
Part Number	Size	W		Required Hole Size for Base Material	Performance Test Results in various Materials							
					3/8" Drywall		1/2" Drywall		5/8" Drywall		Masonry Block	
		Pull-Through Load	Recom-mended Working Load		Pull-Through Load	Recom-mended Working Load	Pull-Through Load	Recom-mended Working Load	Pull-Through Load	Recom-mended Working Load		
		Lbs.	Lbs.		Lbs.	Lbs.	Lbs.	Lbs.	Lbs.	Lbs.		
		348948	1/8		1.5"	13/32	68	23	111	37	124	41
348951	3/16	2"	13/32	68	23	115	38	133	44	452	150	
348960	1/4	2"	13/32	96	32	121	40	123	41	1091	363	

Description	This is a 3-piece anchor that consists of (1) a metal toggle bent at two 90° angles with an internally threaded hole at its center, (2) a serrated nylon strap that extends from both sides of the metal toggle, (3) a shoulder washer that slides down the strap and fits snug into the predrilled hole on the front side of the assembly. Upon installation, the extra length of the strap snaps off.	
Applications/Advantages	May be used in hollow wall or masonry block. Can be re-used multiple times. Is easy for one person to install. Has superior pull-out load compared to other hollow wall anchors. Eliminates the need for extra long screws that are sometimes required with other hollow wall anchors.	
Material	Toggle: Cold rolled steel Strap And Shoulder Washer: Nylon	