


WASHERS

DIN 433 Flat

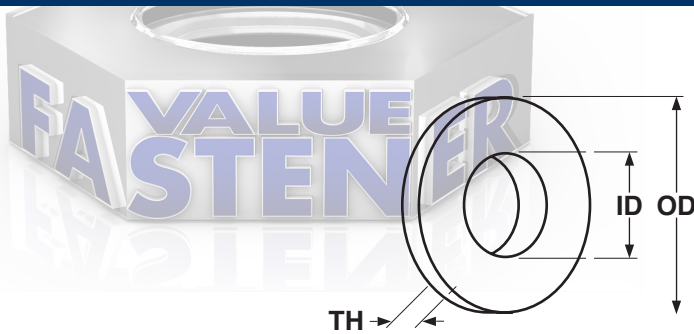

METRIC - SMALL FLAT WASHERS						DIN 433
Nominal Size	ID		OD		TH	
	Internal Diameter		Outside Diameter		Thickness	
	Max	Min	Max	Min	Max	Min
4	4.48	4.3	9	8.64	0.9	0.7
5	5.48	5.3	10	9.64	1.1	0.9
6	6.62	6.4	12	11.57	1.8	1.4
8	8.62	8.4	16	15.57	1.8	1.4
10	10.77	10.5	20	19.48	2.2	1.8

Description	A thin, flat circular part with a centrally located hole. The outside diameter of this variety washer is smaller than that of a like-sized standard flat washer. Only the ISO 7092 washer has a smaller OD..
Applications/ Advantages	<p>The DIN 433 flat washer is ideal for use with Cheese Head screws..</p> <p><u>Class 140 HV</u> & <u>Class 200 HV</u> metric washers meet the majority of industrial applications in manufacturing, maintenance and repair.</p> <p><u>Class 300 HV</u> metric washers are best suited for use with through-hardened cap-screws, bolts and nuts.</p>
Material	Low or medium carbon steel
Hardness	<p>Class 140 HV: HV 140 minimum (Rockwell B 75 minimum)</p> <p>Class 200 HV: HV 200-300 (Rockwell B 91.5 - C 29.8)</p> <p>Class 300 HV: HV 300-400 (Rockwell C 29.8 - 40.8)</p>
Plating	See Appendix-A for information about the plating of flat washers.